



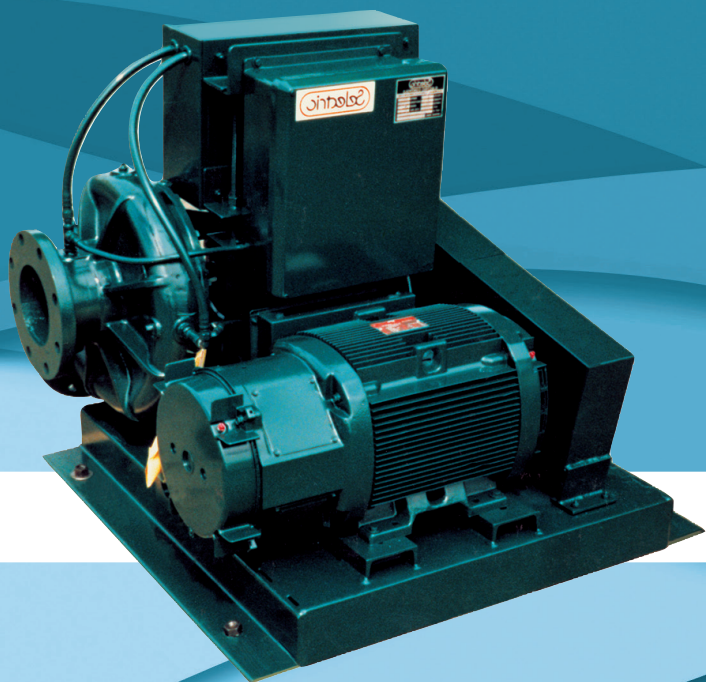

CORNELL PUMP COMPANY

HYDRO TURBINES

GENERATE POWER FROM EXCESS HEAD

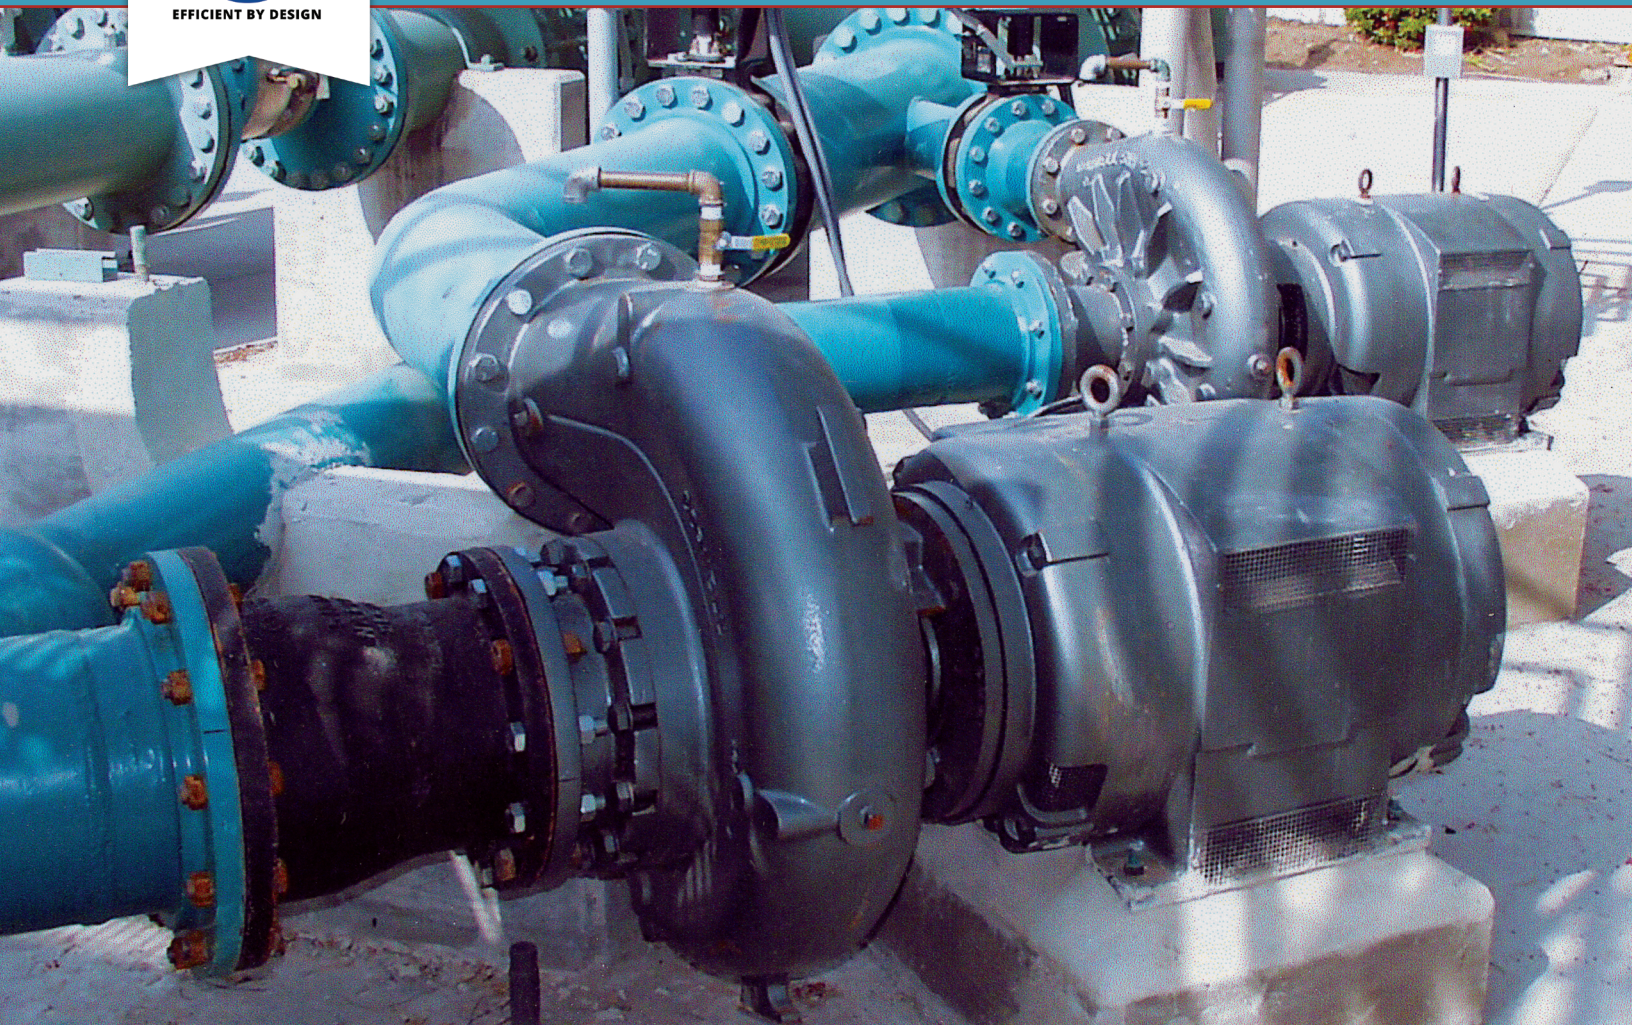


EFFICIENT BY DESIGN





HYDRO TURBINES

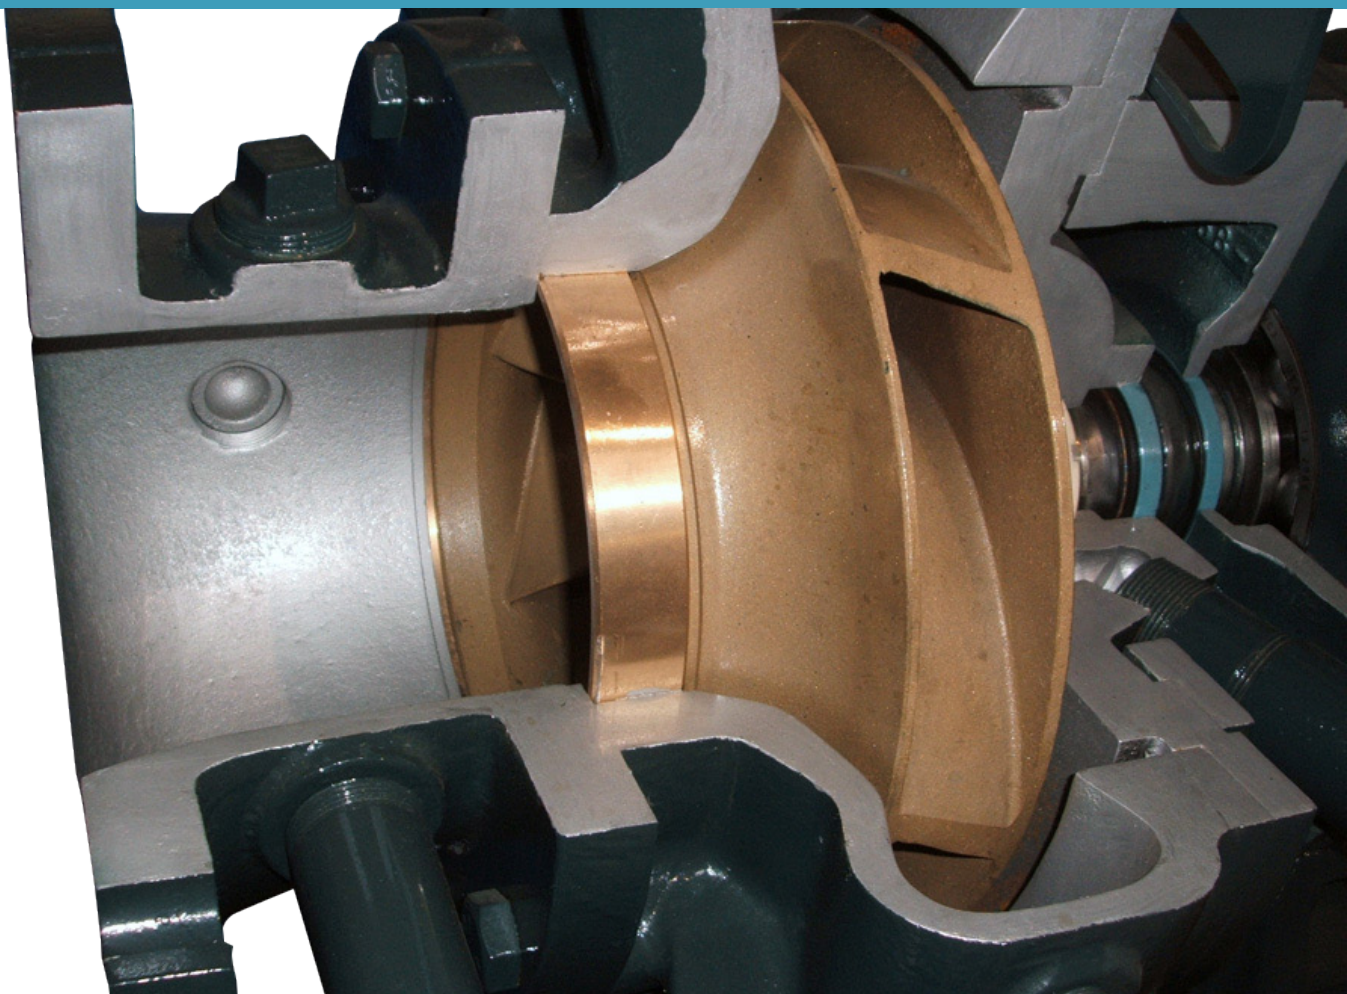

PUT EXCESS HEAD TO WORK FOR YOU

Industrial plants, municipalities, HVAC installations, and farms are tapping potential hydraulic energy sources to produce electric power as a revenue source, or as a means to reduce overall energy demands. The key to the system is the use of excess head to drive a turbine. The turbine may be used to drive a pump, a generator, or other power-requiring device. This technology makes it feasible for cities, farmers, resort managers, industrial plants and building managers to consider hydro turbines in their plant power needs. Studies show that a turbine, driven by water from a natural stream or process stream, can generate enough electric power to pay for itself in a short time.

LOW-MAINTENANCE, HIGH EFFICIENCY DESIGNS

You don't need a raging river to take advantage of the energy savings a Cornell hydro turbine can provide. Heads as low as 50 feet, and flows as low as 90 gallons

per minute can produce useable energy. Cornell's high turbine efficiency is often found to be comparable with specially-built imported turbines. They are less complex, easier to install and require less maintenance. Cornell turbines are available in a wide range of configurations and mounting styles. Cornell's approach to turbine applications has generated many new and innovative design features, resulting in unexpectedly high performance.

CORNELL SUPPORT FROM THE START

This high performance can be documented by actual performance tests on ordered units, conducted in Cornell's modern hydraulic lab under controlled conditions, by professional engineers. Let Cornell staff engineers and sales staff provide specialty application and selections assistance. Whether your needs are demanding, requiring turbines in series or parallel, or utilize a single unit, Cornell will assist in your selection of a hydro turbine.

GENERATOR TYPES

INDUCTION

The generator must be connected to an existing power grid. The speed is controlled by virtue of being connected to the grid, the same way motor speed is maintained. It requires an automatic disconnect from the grid for when grid power fails.

SYNCHRONOUS

The generator is stand alone. It can be used where there is no electrical grid nearby. It requires a load controller (not provided by Cornell) to maintain standard speed, voltage and phase.


PRESSURE SURGE (WATER HAMMER) PROTECTION

During grid power loss, a reaction turbine speeds up and the flow through it drops. The magnitude of the flow change depends on the turbine's design and the operating conditions. The flow change may occur very rapidly (in a few seconds) and can cause a pressure surge (water hammer) that is strong enough to damage or destroy the turbine and piping. The pressure surge can be reduced by:

- Adding mass in the form of a flywheel
- Installing a quick opening bypass valve in parallel with the turbine

CONTROLS



Hydro turbines need to be equipped with a control valve at the inlet of the turbine. This valve serves as an isolation device and can be used to control the head and flow through the turbine. The controls should include speed measuring devices. The control system should be designed so that during normal operation electrical contact is made or broken at or near the generator nominal (no load) speed. When power fails, the control system must break the electrical contact and close the inlet valve. It is advisable to contact your utility to determine if there are any special requirements.

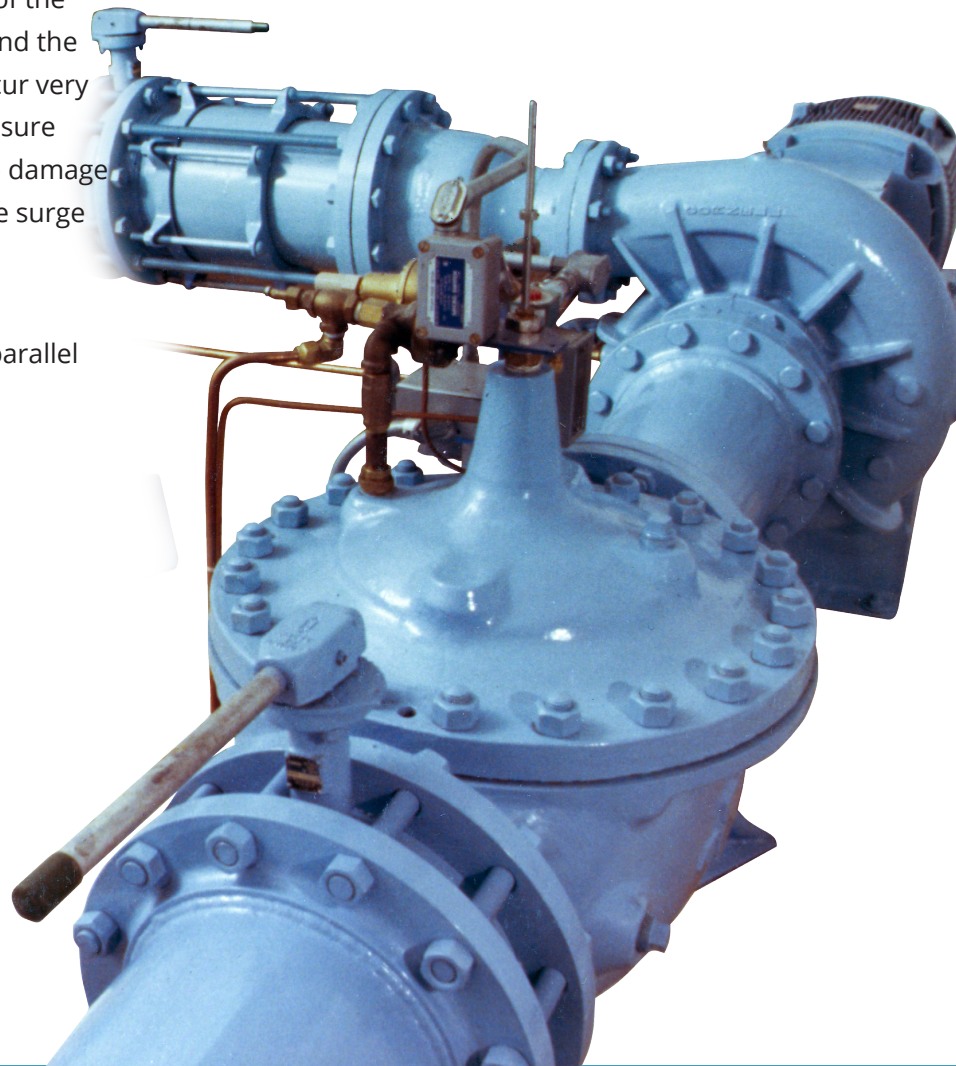

A municipal installation of a 6TR2 using control valves on the turbine lines to throttle the water pressure and regulate power generation.


STANDARD TURBINE CONSTRUCTION

Turbine Body	Cast Iron, Bronze fitted is standard. Ductile Iron, Steel, Bronze, or Stainless Steel models also available.
Seal	Mechanical shaft seal is standard, packing is optional.
Generator	Standard ODP generator-optional TEFC.

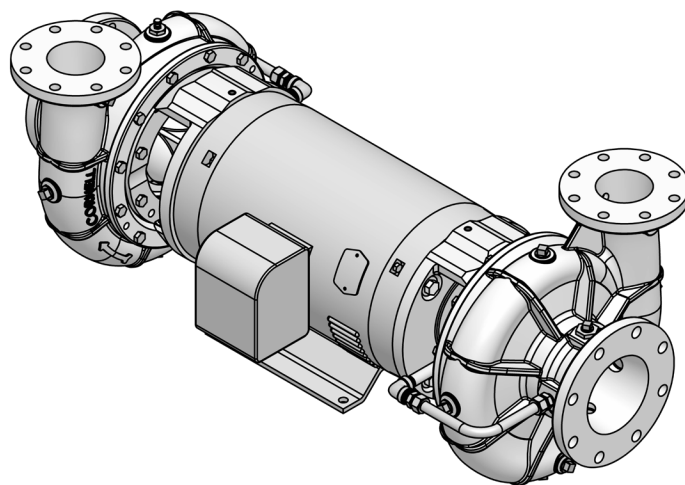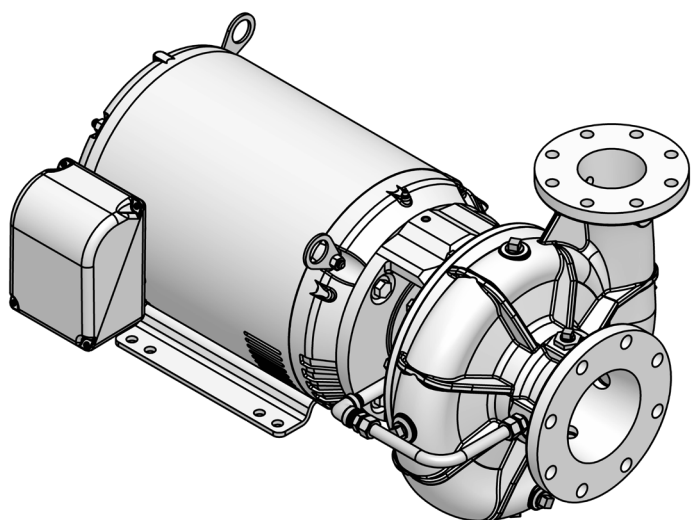

CLOSE-COUPLED, DOUBLE ENDED

This assembly allows the turbine to reduce a pumping load. The pump and turbine share a common motor, with the turbine on one end and the pump on the other. Both are close-coupled, with all the features to suit a special installation. Especially suited to HVAC installations.

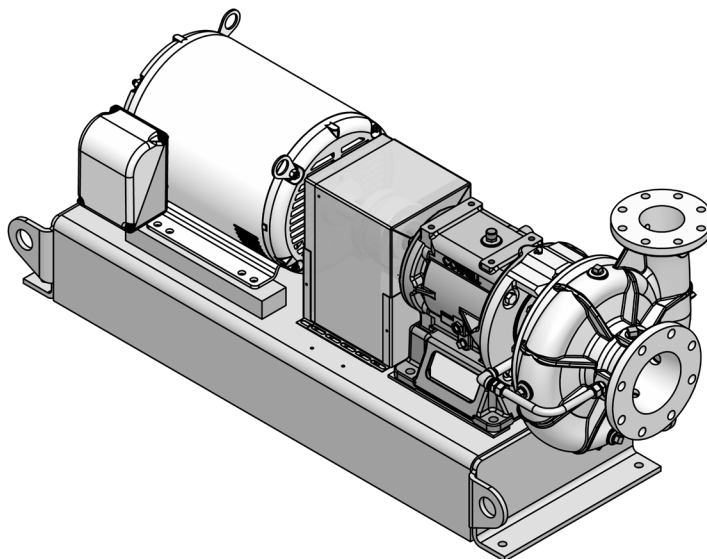



CLOSE-COUPLED

A close-coupled design is the simplest of assemblies. There is no coupling to align and it saves space. Available only with induction generators.

FRAME-MOUNTED WITH GENERATOR


A frame-mounted turbine can be coupled to a generator and assembled on a fabricated steel base.

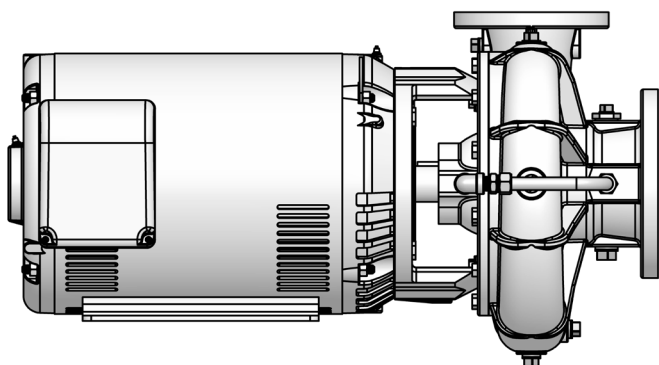

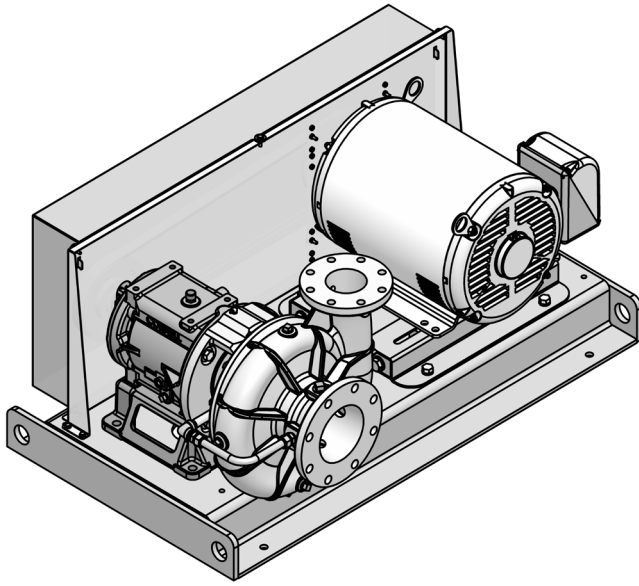



SIDE-BY-SIDE BELT DRIVE

When space does not allow for a standard frame mount unit, it may be possible to belt drive the generator.

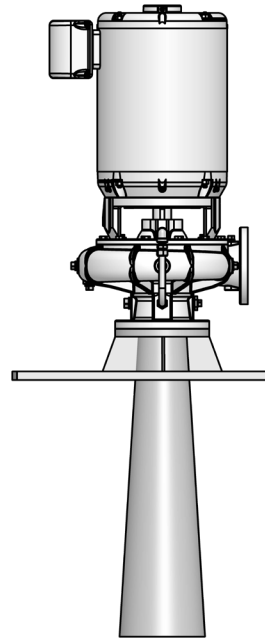


CLOSE-COUPLED VERTICAL WITH CUSTOM DRAFT TUBE

For added space saving or simplicity of manifolding, close-coupled, vertical mount with custom draft tube (available less draft tube for discharge manifold mounting).

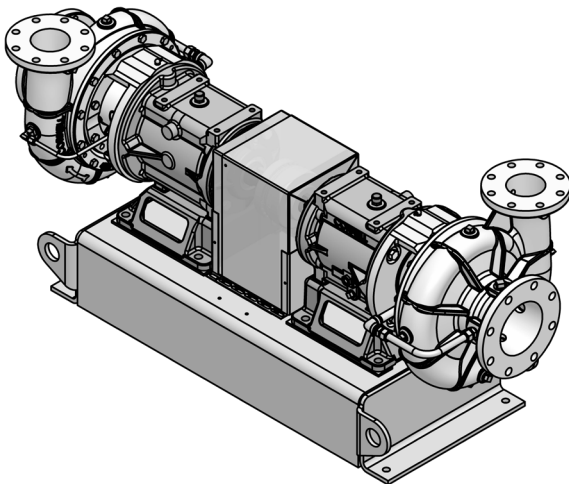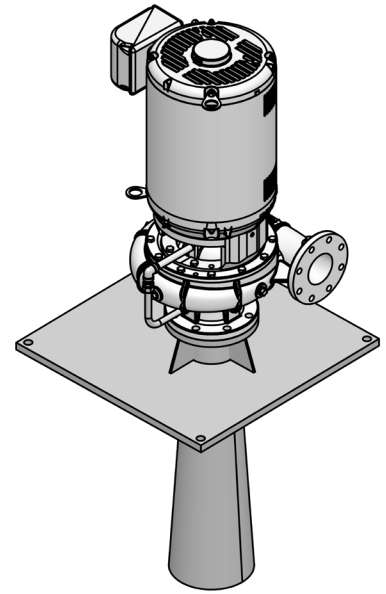


FRAME MOUNT DRIVING A PUMP

Especially useful when a low head, high flow water source is available to provide power for a pump moving water to a higher elevation.

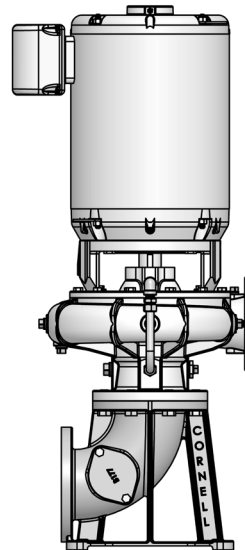

CLOSE-COUPLED VERTICAL WITH BASE ELBOW

When floor space is at a premium, a vertical unit may be the best option.

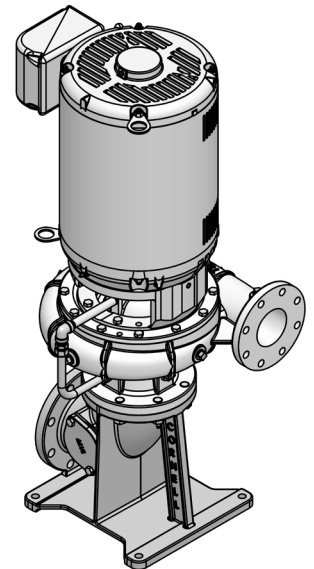



HYDRO TURBINES

HYDRO TURBINE DATA WORKSHEET

(for Preliminary Evaluation)

PROJECT NAME

CONTACT NAME

ADDRESS

PHONE

EMAIL

SITE INFORMATION

WATER SOURCE

☐

STREAM

☐

RESERVOIR (USES ENTIRE SYSTEM HEAD)

GROSS HEAD
(STATIC)

NET HEAD
(INCLUDES FRICTION
LOSS)

AVAILABLE FLOW

PENSTOCK DIAMETER

PENSTOCK LENGTH

PRESSURIZED SYSTEM (PRESSURE REDUCTION)

INLET PRESSURE

OUTLET PRESSURE
REQUIRED

DESIGN FLOW

ELECTRICAL CHARACTERISTICS

MOTOR TYPE

☐

INDUCTION (GRID INTERFACE)

☐

ODP

☐

SYNCHRONOUS (STAND-ALONE)

☐

TEFC

VOLTAGE

PHASE

☐

THREE

☐

SINGLE

CYCLES (HERTZ)

☐


60 HZ

☐


50HZ

Complete this form online at
www.cornellpump.com/hydro-turbine-worksheet
for evaluation by Cornell staff.


*Two units in parallel between an inlet
manifold above and outlet manifold below.*

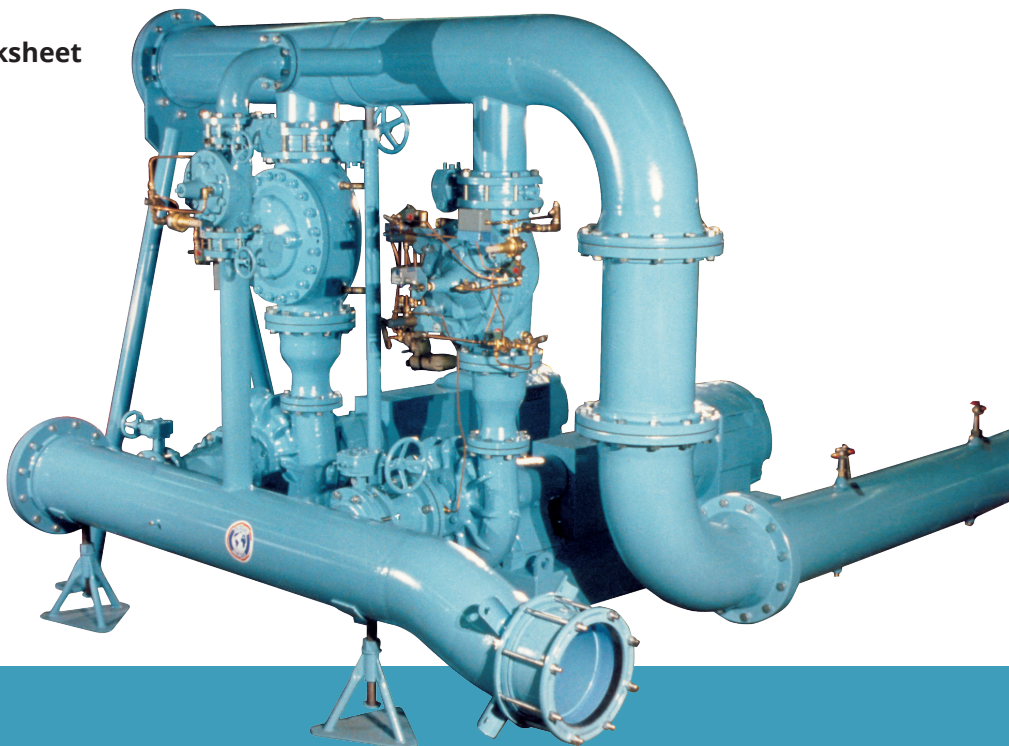

TURBINE SELECTION CHART - 1200 RPM

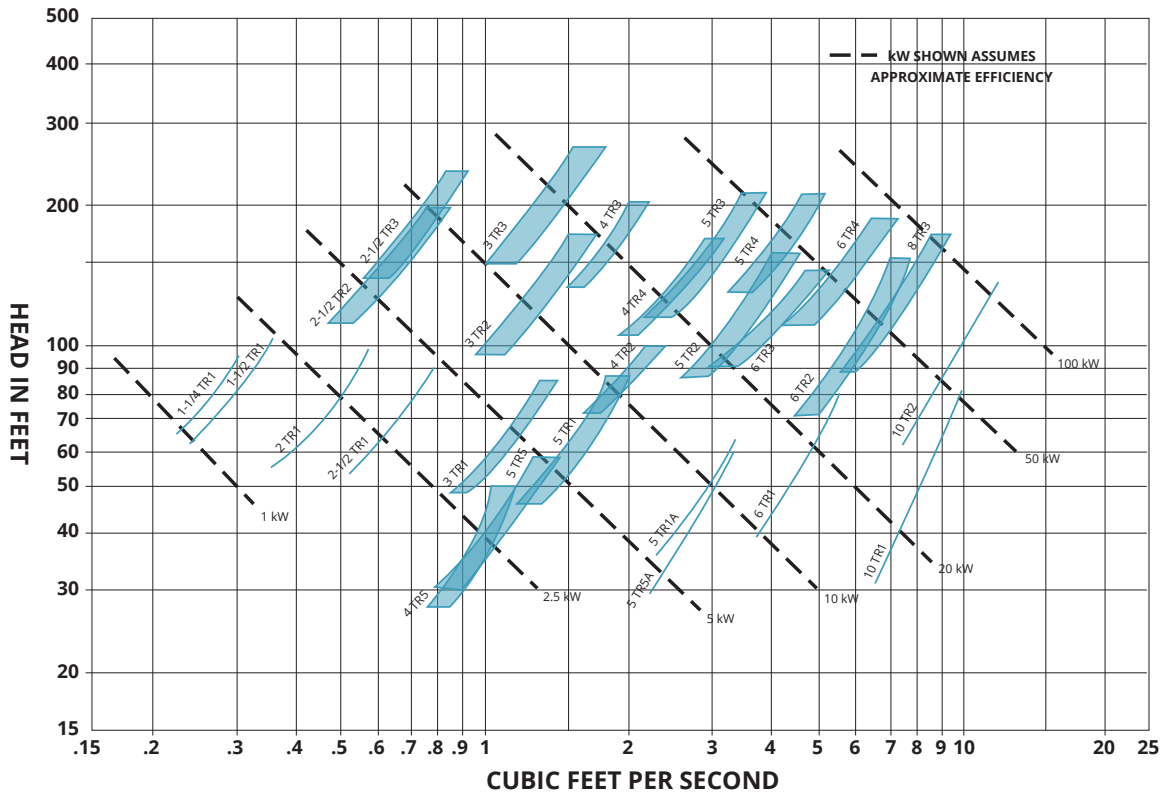

TURBINE SELECTION CHART - 1800 RPM

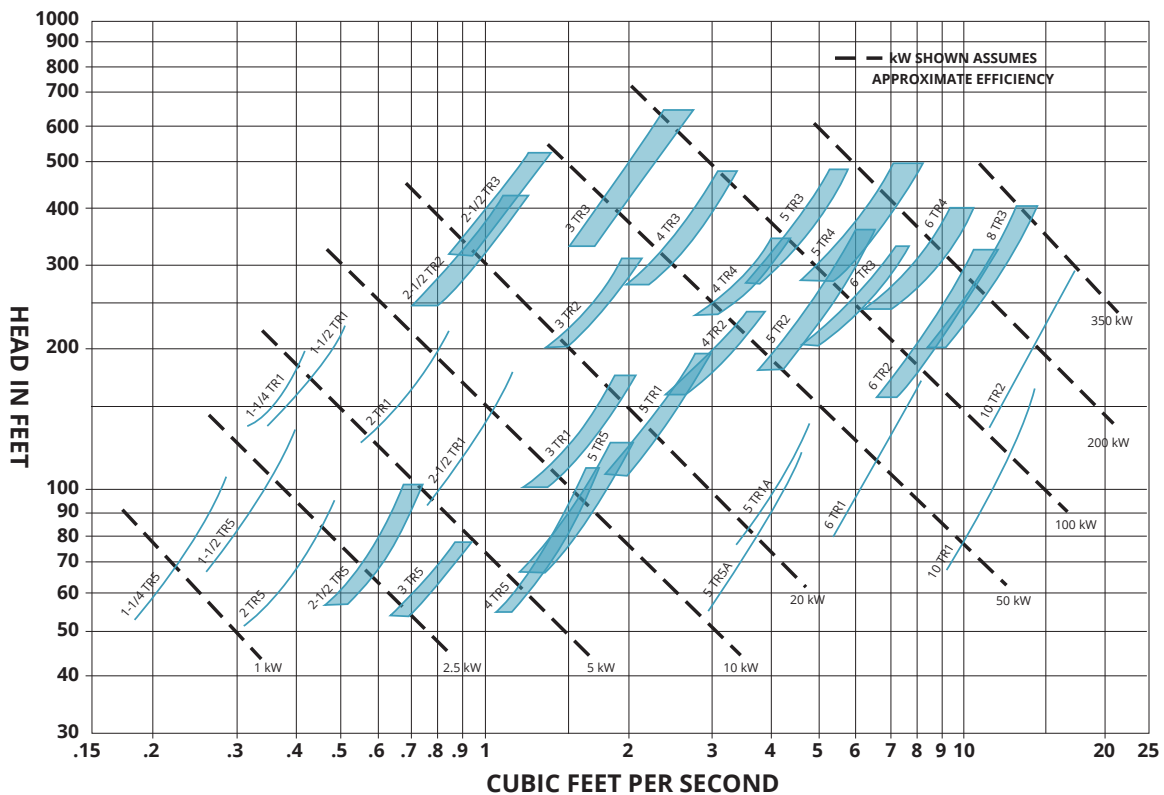



MARKET AND PRODUCT LINE




AGRICULTURE



FOOD PROCESS



INDUSTRIAL



MINING



MUNICIPAL




WATER
TRANSFER




REFRIGERATION




CONSTRUCTION




SLURRY



SLURRY SM



MANURE



CUTTERS




SELF PRIMING



V SERIES



MX SERIES



N SERIES



Q-MAX



EDGE™



HYDRAULIC
SUBS



IMMERSIBLE



CD4MCU



RUN-DRY™



PRIMING
SYSTEMS



CYCLOSEAL®

CycloSeal® and Redi-Prime® are Registered Trademarks of Cornell Pump Company.

Cornell pumps and products are the subject of one or more of the following U.S. and foreign patents: 3,207,485; 3,282,226; 3,295,456; 3,301,191; 3,630,637; 3,663,117; 3,743,437; 4,335,886; 4,523,900; 5,489,187; 5,591,001; 6,074,554; 6,036,434; 6,079,958; 6,309,169; 2,320,742; 96/8140; 319,837; 918,534; 1,224,969; 2,232,735; 701,979 and are the subject of pending U.S. and foreign patent applications.

CORNELLPUMP.COM
©2018 CORNELL PUMP COMPANY



Cornell Pump Company
Clackamas, Oregon, USA
P: +1 (503) 653-0330
F: +1 (503) 653-0338

AUTHORIZED CORNELL PUMP DISTRIBUTOR



+1 360 . 314 . 2692
+1 360 . 521 . 7524



jlewis@centexfp.com
www.centexfp.com



7600 NE 47th Avenue
Vancouver, WA 98661 - USA

