



CORNELL PUMP COMPANY SUBMERSIBLES



EFFICIENT BY DESIGN

SUBMERSIBLE PUMP FEATURES

CAPACITIES FROM 80 GPM TO 15,000 GPM AND HEADS FROM 10 FEET TO 400 FEET GIVE CORNELL A CLEAR PERFORMANCE ADVANTAGE.

EXCELLENT EFFICIENCIES

Cornell uses the same high efficiency pump-ends for our submersibles that have been proven time and time again in standard municipal applications. Coupled with the highest quality motors, Cornell's submersible product line provides the best possible value. The bottom line – Cornell Submersible Pumps cost less to operate.

RELIABLE MOTOR

At Cornell we understand the need for reliability, durability and efficiency. This is why we have coupled our pumps with the most reliable and durable submersible motors on the market. Cornell motors are FM approved and suitable for Class I, Division I, Group C & D, explosion proof service and are inverter duty. Non-wicking, Permanently numbered leads are potted into a separate cable cap assembly, preventing leakage to the stator. Cornell motors are protected by thermostats and utilize class F insulation. Dual moisture probes are installed for the early detection of seal failure. Heavy Duty ball bearings are standard.

LONG LIFE MECHANICAL SEALS

Each pump is supplied with Tungsten mechanical seals and an oil reservoir with moisture sensor probes to provide the maximum protection against damage from leakage. Lower seal is carbon vs. ceramic.

HIGH TEMPERATURE PROTECTION


Motor Temperature protection is embedded in the stator windings to shut the motor down in case of abnormally high temperatures.

GLYCOL FILLED, CLOSED LOOP COOLING

When necessary, Cornell Submersibles can be furnished with a cooling jacket and heat exchanger, filled with glycol, that will protect the motor from overheating during extended periods of low liquid level operation, or when handling high temperature liquids. Cooling jackets are available on pumps ranging from 10 to 125 horsepower


RUGGED CONSTRUCTION

All of Cornell's submersible pumps come standard with heavy-wall volutes for extended life under abrasive service conditions, smooth passage impellers for optimal hydraulic efficiency and reduced operating cost plus replaceable wear rings and back pull-out design for ease of maintenance. Standard casing and impeller construction is ASTM A48, Class 30 Cast Iron. Special materials are available for high corrosion or abrasive pumpage.

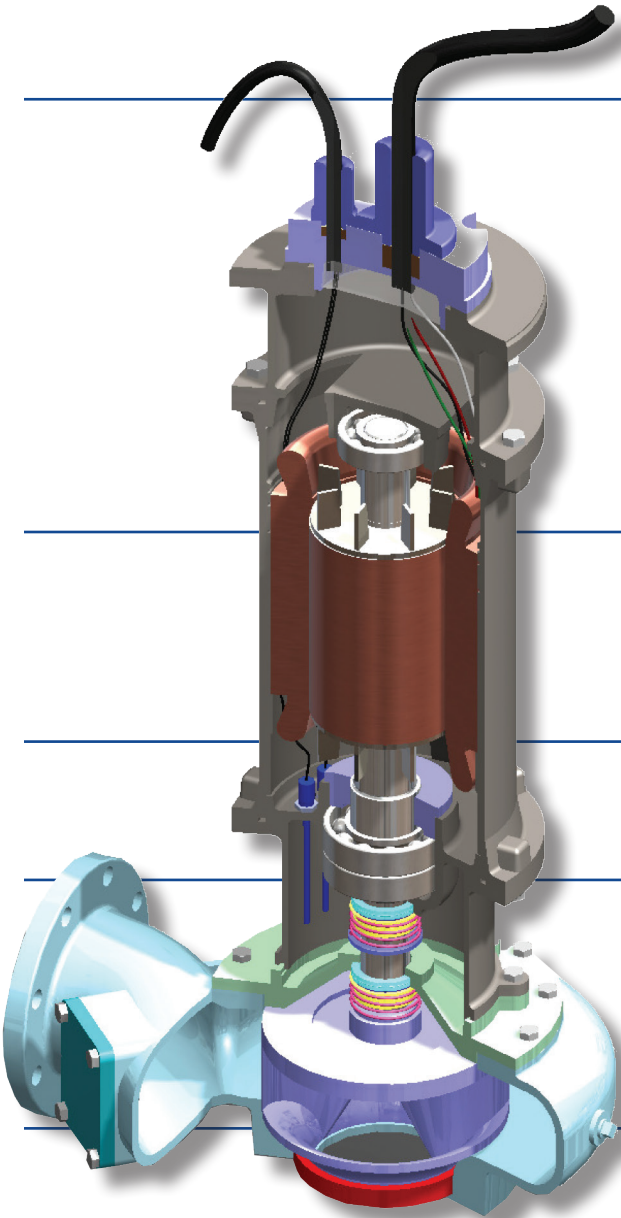


Cycloseal® available on some models. Learn more at:
<http://www.cornellpump.com/cycloseal-system/>

PERFORMANCE CURVES

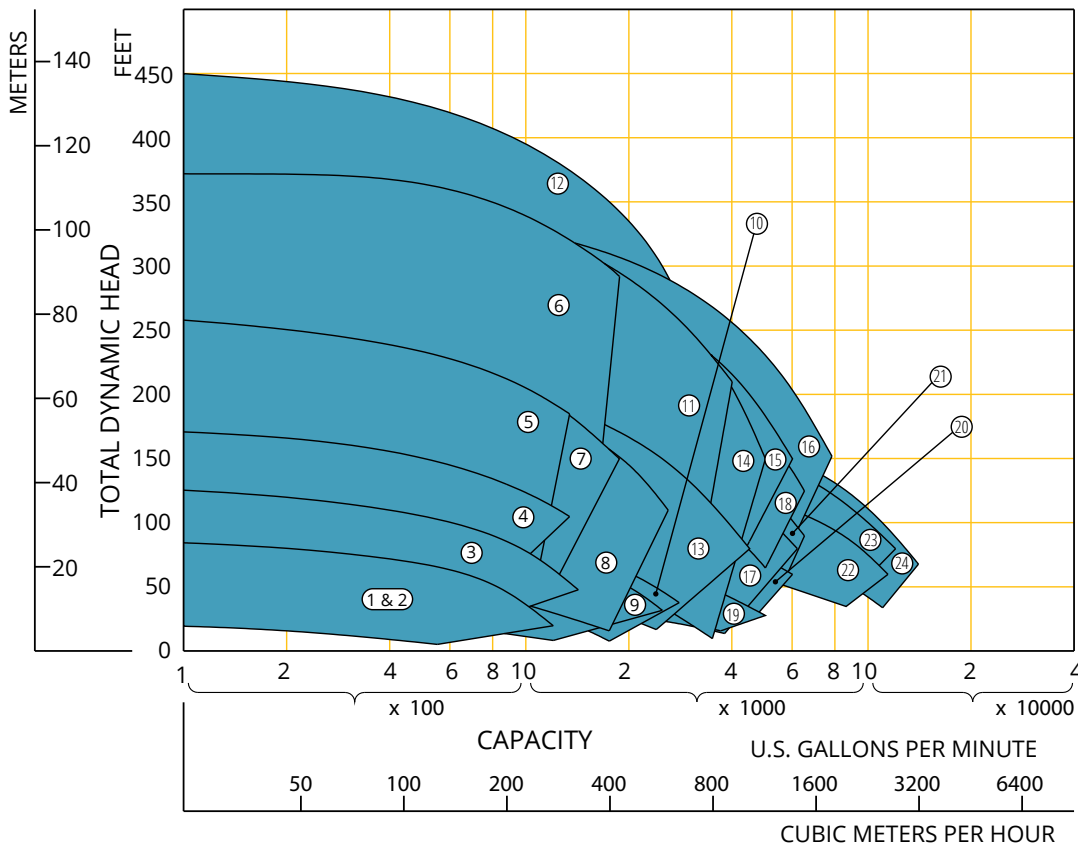

NON-CLOG SUBMERSIBLES

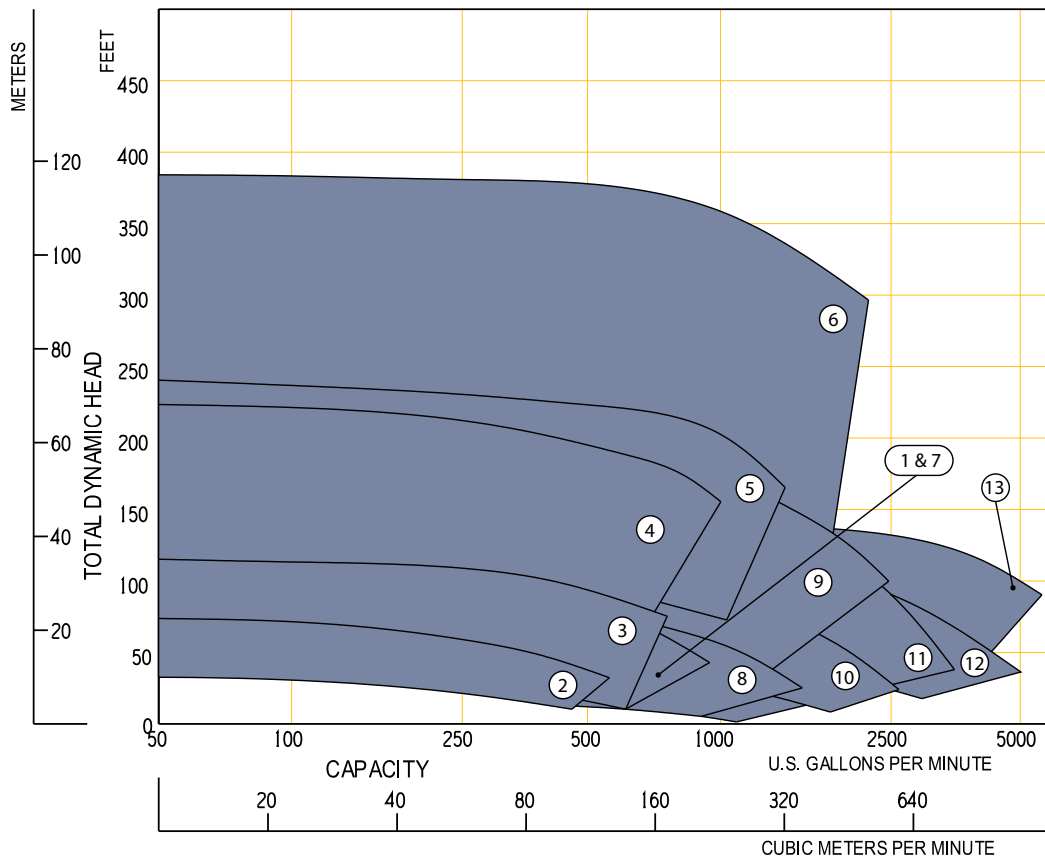

DELTA SUBMERSIBLES



MARKET AND PRODUCT LINE




AGRICULTURE



FOOD PROCESS



INDUSTRIAL



MINING



MUNICIPAL




WATER
TRANSFER



REFRIGERATION




CONSTRUCTION




SLURRY



SLURRY SM



MANURE



CUTTERS




SELF PRIMING



V SERIES



MX SERIES



N SERIES



Q-MAX



EDGE™



HYDRAULIC
SUBS



IMMERSIBLE



CD4MCU



RUN-DRY™



PRIMING
SYSTEMS



CYCLOSEAL®

CycloSeal® and Redi-Prime® are Registered Trademarks of Cornell Pump Company.

Cornell pumps and products are the subject of one or more of the following U.S. and foreign patents: 3,207,485; 3,282,226; 3,295,456; 3,301,191; 3,630,637; 3,663,117; 3,743,437; 4,335,886; 4,523,900; 5,489,187; 5,591,001; 6,074,554; 6,036,434; 6,079,958; 6,309,169; 2,320,742; 96/8140; 319,837; 918,534; 1,224,969; 2,232,735; 701,979 and are the subject of pending U.S. and foreign patent applications.

CORNELLPUMP.COM
©2017 CORNELL PUMP COMPANY



Cornell Pump Company
Clackamas, Oregon, USA
P: +1 (503) 653-0330
F: +1 (503) 653-0338

AUTHORIZED CORNELL PUMP DISTRIBUTOR



+1 360 . 314 . 2692
+1 360 . 521 . 7524



jlewis@centexfp.com
www.centexfp.com



7600 NE 47th Avenue
Vancouver, WA 98661 - USA

