

AVAILABLE MOUNTING CONFIGURATIONS

4HC-RP-F REDI-PRIME FRAME MOUNT 4HC-F FRAME MOUNT 4HC-RP-EM REDI-PRIME ENGINE MOUNT 4HC-EM ENGINE MOUNT 4HC-VF VERTICAL FRAME MOUNT 4HC-VC VERTICAL COUPLED 4HC-CC CLOSE COUPLED

OPERATING LEVELS		
MIN FLOW	165 GPM	37.5 m³/h
MAX FLOW	1680 GPM	381.6 m³/h
DISCHARGE SIZE	4"	101.6 mm
SUCTION SIZE	8″	203.2 mm
SOLIDS HANDLING	.6″	15.7 mm
MAX SPEED	2100 RPM	2100 RPM
SHUT-OFF HEAD	430'	131 m
BEP HEAD	400′	122 m
BEP FLOW	1540 GPM	350 m³/h
BEP PERCENT	74%	74%



DATA SHEET

4HC

A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

PARTS	STANDARD MATERIAL (ALL IRON)
WEAR RING	CAST IRON
IMPELLER	CAST IRON
VOLUTE	CAST IRON
SHAFT	STRESSPROOF STEEL
SHAFT SLEEVE	STAINLESS
BACKPLATE	CAST IRON
BEARING FRAME	CAST IRON - F16,F18

The 4HC pump is designed with Cornell's renowned quality and durability. It features a 4" discharge, 8" suction, and enclosed impeller. Available in All Iron or CD4MCu materials. Cornell's patented Cycloseal[®] design is standard, with a Type 2 single mechanical seal with Buna-N or Viton elastomers, stainless steel hardware and tungsten carbide vs. silicon carbide seal faces for abrasion resistance.


- Enclosed impeller for higher efficiency
- Excellent NPSHr
- Heavy duty construction

- Industry-leading efficiencies
- Patented Cycloseal design



DATA SHEET



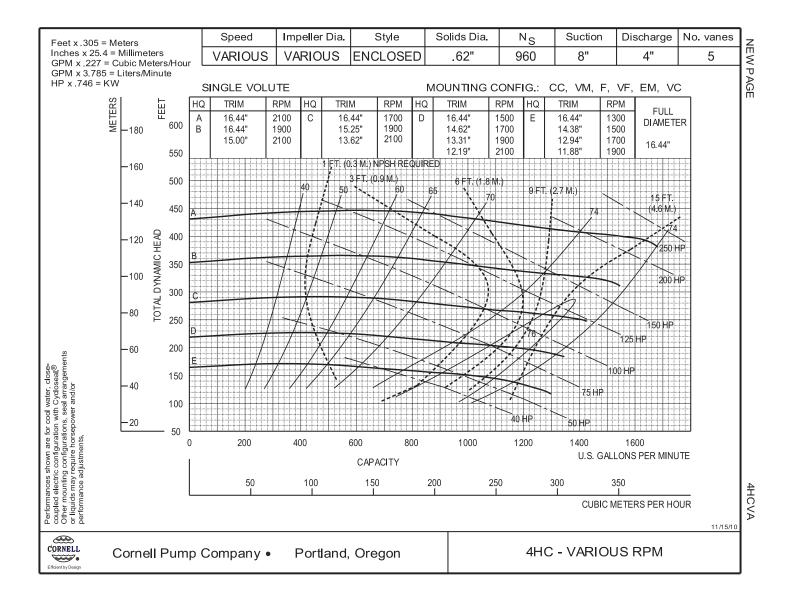

DS022-1709-GE

Cornell Pump Company | Clackamas, OR 97015 USA | www.cornellpump.com | P: +1 (503) 653-0330 | F: +1 (503) 653-0338